



# Instruction Manual

## Alfa Laval Rotary Jet Mixer IM 10



Covering:  
Standard Machines  
TE911600-EN5

ESE02265-EN5      2016-01

Original manual



The information herein is correct at the time of issue but may be subject to change without prior notice

<b>1. EC Declaration of Conformity</b> .....	<b>4</b>
<b>2. Safety</b> .....	<b>5</b>
2.1. Important information .....	5
2.2. Warning signs .....	5
<b>3. Introduction</b> .....	<b>6</b>
3.1. Introduction .....	6
3.2. Marking .....	7
3.3. Intended Use .....	8
3.4. Patents and Trademarks .....	8
3.5. Quality System .....	8
<b>4. Installation</b> .....	<b>9</b>
4.1. General Description .....	9
4.2. Functioning .....	10
4.3. General Safety and Installation Instructions .....	12
4.4. Safety Precautions .....	13
<b>5. Operation</b> .....	<b>14</b>
5.1. Normal operation .....	14
<b>6. Maintenance</b> .....	<b>15</b>
6.1. Service and Repair	
Recommended Service Intervals .....	15
6.2. Preventive Maintenance .....	16
6.3. Assembly of Turbine and Carrier .....	18
6.4. Remaining Assemblies .....	20
6.5. Replacement of Ball Races .....	22
6.6. Replacement of PEEK-bushing .....	23
<b>7. Trouble Shooting Guide</b> .....	<b>24</b>
<b>8. Technical Data</b> .....	<b>26</b>
<b>9. Product Programme</b> .....	<b>28</b>
9.1. Standard configuration for Alfa Laval Rotary Jet Mixer IM 10 .....	28
9.2. Available add-ons .....	29
<b>10. Parts Lists and Drawings, Service Kits and Tools</b> .....	<b>30</b>
10.1. Reference list of parts .....	30
10.2. Cross sectional drawing .....	31
10.3. Service kit .....	32
10.4. Tools .....	32
<b>11. General information</b> .....	<b>33</b>
11.1. Service & Repair .....	33
11.2. How to order Spare Parts .....	33
11.3. How to contact Alfa Laval Tank Equipment .....	33
<b>12. Miscellaneous</b> .....	<b>34</b>
12.1. Declaration of Compliance with 10/2011 – Food contact materials .....	34

---

# 1 EC Declaration of Conformity

The Designated Company

Alfa Laval Kolding A/S

Company Name

Albuen 31, DK-6000 Kolding, Denmark

Address

+45 79 32 22 00

Phone No.

hereby declare that

Tank Cleaning Machine

Designation

Alfa Laval Rotary Jet Mixer IM 10

Type

From serial number 2015-0001 to 2030-99999

is in conformity with the following directive with amendments:

**Machinery Directive 2006/42/EC**

- DS/EN ISO 12100:2010

**The Pressure Directive 97/23/EC**

- According to its own volume and the rated pressure range, the product is regarded an Article 3, paragraph 3 Equipment

**FDA 21CFR§177**

**Regulation (EC) 1935/2004**

The person authorised to compile the technical file is the signer of this document

Global Product Quality Manager  
Pumps, Valves, Fittings and Tank Equipment

Title

Lars Kruse Andersen

Name

Kolding

Place

2016-01-01

Date



Signature

(This Declaration of Conformity replaces Declaration of Conformity dated 2015-01-01)



*Unsafe practices and other important information are emphasized in this manual.  
Warnings are emphasized by means of special signs.  
**Always read the manual before using the mixer!***

---

### 2.1 Important information

---

#### **WARNING**

Indicates that special procedures must be followed to avoid serious personal injury.

#### **CAUTION**

Indicates that special procedures must be followed to avoid damage to the mixer.

#### **NOTE**

Indicates important information to simplify or clarify procedures.

---

### 2.2 Warning signs

---

General warning:



## 3 Introduction

---

### 3.1 Introduction

---

#### Introduction

This manual has been prepared as a guide for the persons who will be operating and maintaining your Alfa Laval Rotary Jet Mixer IM 10. The key to long life for your mixer will always be a system of carefully planned maintenance procedures; you will appreciate that a mixer which has a rough job to do will need more frequent attention than one working in ideal conditions.

**Note:** Get the best and most economical performance from your tank cleaning machine. Insufficient preventive maintenance means poor performance, unscheduled stops, shorter lifetime and extra costs. Good preventive maintenance on the contrary means good performance, no unscheduled stops and superior total economy.

You will find the information contained in this manual simple to follow, but should you require further assistance, our Technical Department will be pleased to help you. Please quote the type and serial number with all your enquiries; this will help us to help you. The type and serial number are placed on the gear house of the mixer.

**Note:** The illustrations and specifications contained in this manual were effective at the date of printing. However, as continuous improvements are our policy, we reserve the right to alter or modify any unit specification on any product without prior notice or any obligation.

**Warning:**



Before installing the machine and setting it into operation carefully read the General Safety and Installation Instructions (page 12) and the Safety Precautions (page 13) and take all necessary precautions according to your application and local regulations.

The English version of the instruction manual is the original manual. We make reservations in regard to possible mistranslations in language versions of the instruction manual. In case of doubt, the English version of the instruction manual applies.

© Alfa Laval Corporate AB

*This document and its contents is owned by Alfa Laval Corporate AB and protected by laws governing intellectual property and thereto related rights. It is the responsibility of the user of this document to comply with all applicable intellectual property laws. Without limiting any rights related to this document, no part of this document may be copied, reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), or for any purpose, without the expressed permission of Alfa Laval Corporate AB. Alfa Laval Corporate AB will enforce its rights related to this document to the fullest extent of the law, including the seeking of criminal prosecution.*

### 3.2 Marking

Alfa Laval tank cleaning machines are all marked to allow recognition of machine type, machine name, Serial number and manufacturing address. The marking are placed on the gear house of the mixer.

#### Marking

Rotary Jet Mixer  
IsoMix IM10  
Patent: EP 1 324 818  
s/n.: yyyy-xxxxx  
Alfa Laval, DK-6000 Kolding, Albuen 31  
CE


#### Serial number explanation

Machines supplied with or without normal documentation:

yyyy-xxxxx: serial number

yyyy: year

xxxxx: 5 digit sequential number

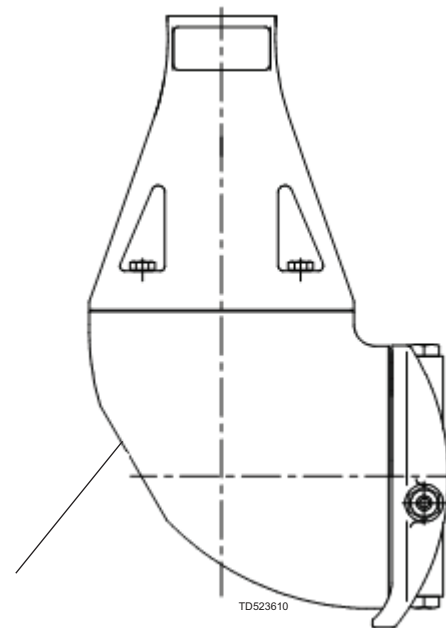

Marking area



## 3 Introduction

---

### 3.3 Intended Use

---

It is to be verified by the end-user:

- that the tank cleaning machine is in conformity with respect to tank, vessel or container size in which it will be used.
- the constructions materials (both metallic and non-metallic) are compatible with product, flushing media, cleaning media, temperatures and pressure under the intended use.

### 3.4 Patents and Trademarks

---

This Instruction Manual is published by Alfa Laval Tank Equipment A/S without any warranty. Improvements and changes to this Instruction Manual may at any time be made by Alfa Laval Tank Equipment A/S without prior notice. Such changes will, however, be incorporated in new editions of this Instruction Manual.

Alfa Laval Kolding A/S. All rights reserved.

Alfa Laval Rotary Jet Mixer IM 10 product has patents in the EPO member states and in other countries. The Alfa Laval logotype is a trademark or a registered trademark of Alfa Laval Corporate AB. Other products or company names mentioned herein may be the trademarks of their respective owners. Any rights not expressly granted herein are reserved.

### 3.5 Quality System

---


The Alfa Laval Mixers are produced according to Alfa Laval Kolding's ISO 9001 international Standard certified quality system.

---

### 4.1 General Description

The Alfa Laval Rotary Jet Mixer IM 10 is a media driven and media lubricated tank/reactor mixer. All materials are selected for contact with food, and the machine is self-cleaning i.e. all internal and external surfaces are cleaned.


#### The Rotary Jet Mixing technology



- A = Rotary Jet Mixer
- B = Gas
- C = Product
- D = Liquid feed


#### Traditional Mixing technology

##### Round pumping



- A = Liquid feed
- B = Product

##### Propeller mixing



## 4 Installation

---


### 4.2 Functioning

---

The Alfa Laval Rotary Jet Mixer IM 10 is placed inside the tank/reactor under the liquid surface of the liquid volume to be mixed.

The mixer is combined with an external recirculation loop. The fluid of the tank/reactor is recirculated through this loop and reintroduced in the tank/reactor through the Alfa Laval Rotary Jet Mixer IM 10. The more fluid being recirculated, the more effective mixing is obtained.

The mixer should be placed in the centre of the fluid to be mixed. Minimum 200 mm under the liquid surface.

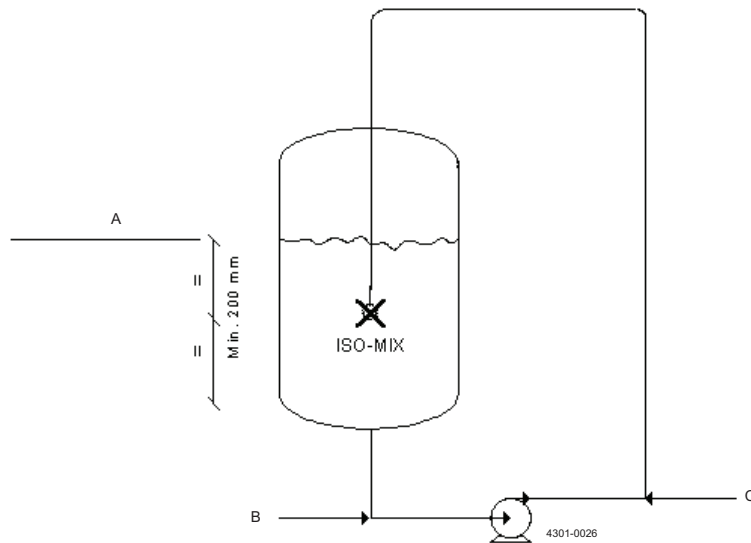

A: normal liquid level


B: Possible liquid or powder supply

C: Possible gas supply

The flow of fluid to be mixed passes from the tank into the mixer through a turbine, which is set into rotation. The turbine rotation is through a gearbox transformed into a combined horizontal rotation of the mixer body and a vertical rotation of the nozzles.

The combined motion of the mixer body and the nozzles ensures a fully indexed tank mixing. After 55/8 revolutions of the hub cover with nozzles (53/8 revolutions of the mixer body), one coarse cleaning pattern is laid out on the tank surface and the first cycle has been made. During the following cycles, this pattern is repeated 7 times, each of which is displaced, and the pattern gradually becomes denser. Finally, after 8 cycles - a total of 45 revolutions of the hub cover with nozzles (43 revolutions of the mixer body), a complete mixing pattern has been laid out, and the first pattern is repeated. This feature eliminates "dead zones" in the tank, and makes the Alfa Laval Rotary Jet Mixer IM 10 a very efficient automatic tank cleaning machine, when the tank is empty.


This is illustrated below for spherical tank with the machine placed in the centre:

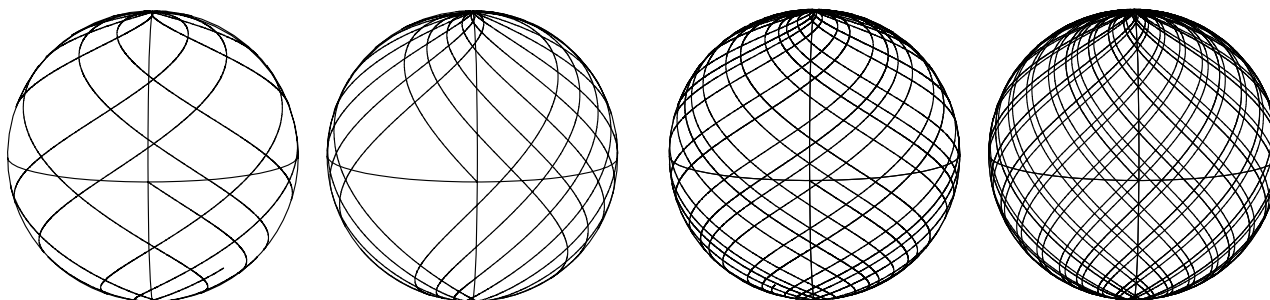

It is possible to add fluid, gas or solids in the recirculation loop. These ingredients will very effectively be mixed into the entire tank/reactor volume.

When the tank/reactor is empty the Alfa Laval Rotary Jet Mixer IM 10 can be used as a tank cleaning machine.

Apart from the main flow flushing the gear and the hub, and thereafter forming the jets through the nozzles, fluid is flushed through all internal areas, through bevel gear, ball bearings and gaps between moving parts and is finally also used for cleaning of the outside surfaces of the machine. The areas behind the screws on the cone are cleaned through small spray holes behind the screws. In the bottom of the body, the machine is equipped with a hole to ensure self-draining. This self-draining is only ensured, if the machine is installed in upright position.

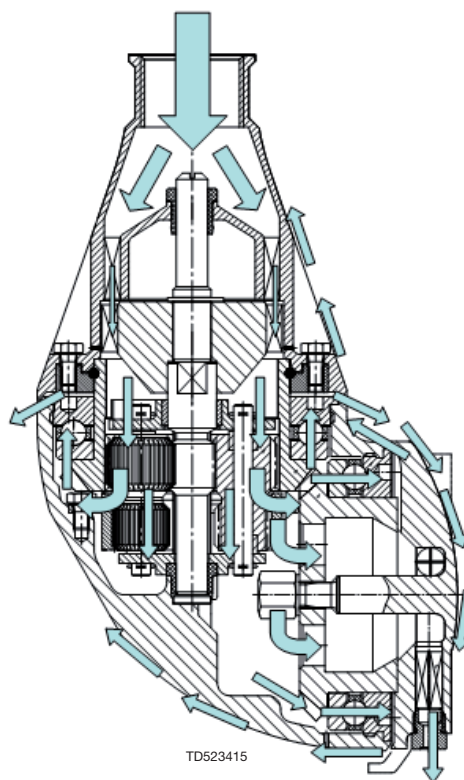

## 4 Installation

---

### 4.3 General Safety and Installation Instructions

---

The Alfa Laval Rotary Jet Mixer IM 10 should be installed in vertical position (upright or upside down). It is recommended to install a filter in the supply line in order to avoid large particles to clog inside the machine. Before connecting the mixer into the system, all supply lines and valves should be flushed to remove foreign matter.

It is recommended to secure the bolted connection between machine and down pipe against loosening to vibrations. Use locking wire, nabs or equivalent for the actual application.

In general a filter with 3 mm holes is recommended in the supply line. In case of fine solid particles below 500 µm in the cleaning fluid, choose filter size accordingly.

It is recommended that the fluid valve fitted is of a type that prevents hydraulic shocks, which may cause severe damage to the entire installation.

The machine should be screwed tightly onto its supporting supply line using a 36 mm flat jawed spanner (tool no. 81B040) and the flats machined on the inlet cone.

For devices with tapered thread connections to the down pipe, it is recommended that you secure the connection in a manner appropriate for the application. Subject to the intended use environment and any in-house user requirements or policies, an adhesive such as Loctite No. 243 or equivalent could be used. Other methods could be acceptable and subject to customer preference.

**Warning:**



If the machine is used in potential explosive atmospheres, tapes or joint sealing compounds which are electrical insulators must not be used on threads or joints, unless an electrical connection is otherwise established to ensure an effective earthing. In addition, connecting pipe work, must be electrically conductive and earthed to the tank structure. The resistance between the nozzles and the tank structure should not exceed 20,000 Ohm. This is essential to avoid the build-up of static electricity on the machine. For further information see IEC/TS 60079-32-1:2013 Safety of Machinery, guidance and recommendations for the avoidance of hazards due to static electricity.

**Note:** The Alfa Laval Rotary Jet Mixer IM 10 shall be installed in accordance with national regulations for safety and other relevant regulations and standards. In EU-countries the complete system must fulfill the EU-Machine Directive and depending of application, the EU-Pressure Equipment Directive, the EU-ATEX Directive and other relevant Directives and shall be CE-marked before it is set into operation.

Check that the mixer is in operating condition by inserting 3/16" Hex Screwdriver (tool no. 134A) in screw in top of turbine shaft and easily turn turbine shaft anti-clockwise. If any resistance is recognised, the mixer should be disassembled in order to localise the cause.

### 4.4 Safety Precautions

---

**Warning:**



Precautions shall be made to prevent starting of the cleaning operation, while personnel are inside the tank or otherwise can be hit by jets from the nozzles.

**ATEX Warning:**



In case potentially explosive liquids are used, precautions should be taken against incidental creation of an explosive mixture with oxygen in the tank atmosphere.

**ATEX Warning:**



If the machine is used in potential explosive atmospheres, tapes or joint sealing compounds which are electrical insulators must not be used on threads or joints, unless an electrical connection is otherwise established to ensure an effective earthing. In addition, connecting pipe work, must be electrically conductive and earthed to the tank structure. The resistance between the nozzles and the tank structure should not exceed 20,000 Ohm. This is essential to avoid the build-up of static electricity on the machine. For further information see IEC/TS 60079-32-1:2013 Safety of Machinery, guidance and recommendations for the avoidance of hazards due to static electricity.

Electrical equipment such as magnetic valves and electric actuators must not be installed in Ex-zones without type approval and marking, corresponding to the EX-class in question.

---

## 5 Operation

---

### 5.1 Normal operation

---

#### **Media to be mixed**

Use mixer only in fluids compatible with stainless steel AISI 316L, SAF 2205, PFA, PEEK, PVDF, A4/EPDM and ceramics (Al<sub>2</sub>O<sub>3</sub>). Furthermore, the fluids to be mixed should not contain abrasive materials and fibrous material and the viscosity should not be above 450 cP. Normal detergents, moderate solutions of acids and alkalis will be acceptable. Aggressive chemicals, excessive concentrations of chemicals at elevated temperatures, as well as certain hydrochlorides should be avoided. If you are in doubt, contact Alfa Laval Tank Equipment A/S.

#### **After-use cleaning**

After use flush the mixer with fresh water. Fluids should never be allowed to dry or set-up in the Alfa Laval Rotary Jet Mixer IM 10 due to possible "salting out" or "scaling" of the ingredient.

#### **Pressure**

Avoid hydraulic shocks. Increase pressure gradually. Do not exceed 8 bar inlet pressure. Recommended inlet pressure: 5-7 bar. High pressure in combination with high flow rate will create consumption of wear parts. If the pump in the recirculation loop is a positive pump giving pressure fluctuation, it is recommended to install a hydrofor in the pipeline.

---

### 6.1 Service and Repair Recommended Service Intervals

---

#### Recommended Service Intervals

Inspection every 1000 working hours. After 4000 working hours: inspection every 500 hours.

A service consists of:

0. At a pressure of 0.3 bar open a hatch in the tank to verify rotation and liquid fans are emerging from all slots.  
ATTENTION: Use only pure water at normal temperature for safety reason

If needed proceed to 1).

1. Un-install the machine.
2. Visual inspection for foreign objects. Remove any objects and clean before rotation verification.
3. Rotation verification by hand for free rotation.
4. Reinstall machine.
5. Fill in the Service Log



## 6 Maintenance

---

---

---

### 6.2 Preventive Maintenance

---

In order to keep your Alfa Laval Rotary Jet Mixer IM 10 servicing you as an efficient tool in your mixing operations, it is essential to maintain its high performance by following a simple preventive maintenance programme, which will always keep your mixer in good condition.

Good maintenance is careful and regular attention!

The following recommended preventive maintenance is based on a Alfa Laval Rotary Jet Mixer IM 10 working in average conditions. However, you will appreciate that a mixer, which has a rough and dirty job to do, will need more frequent attention than one working in ideal conditions. We trust that you will adjust your maintenance programme to suit.

Alfa Laval Tank Cleaning Equipment Service Kits contain all you need. They comprise genuine Alfa Laval spare parts, manufactured to the original specifications.

Always use only proper tools. Use standard tool kit for Alfa Laval Rotary Jet Mixer IM 10 (page 32). If not stated otherwise never use unnecessary force (i.e. hammer or pry) components together or apart. Always perform all assembly/disassembly steps in the order described in this manual.

Never assemble components without previous cleaning. This is especially important at all mating surfaces. Work in a clear well lighted work area.

According to "Regulation (EC) No 1935/2004 - Article 17" effective from 27th of October 2006, producers of food shall ensure traceability of the materials and articles intended to come into contact with foodstuffs. It is recommended that a traceability system is setup for replacement of wear parts and spare parts. This makes it possible to identify into which machine a given wear part or spare part has been inserted.

**Note:** Get the best and most economical performance from your mixer. Insufficient preventive maintenance means poor performance, unscheduled stops, shorter lifetime and extra costs. Good preventive maintenance on the contrary means good performance, no unscheduled stops and superior total economy.

#### Every 2500 working hours

1. Disassemble machine as described on the following pages.
2. Clean material build-up and deposits from internal parts with chemical cleaner and/or desired fine abrasive cloth.
3. Check slide bearing (pos. 14, page 20) for wear. If end face of slide bearing is worn more than 1 mm into slide bearing, it should be replaced.
4. Check bearings for turbine shaft (pos. 3, page 18) in cone and body. If holes are worn oval to a max diameter of more than 10.4 mm, bearings should be replaced. Thickness of collar is to be min. 3.5 mm for bearing in body.
5. Check carrier bearing (pos. 15.3, page 18). If worn oval to a max diameter of more than 15.8 mm, it should be replaced.

**Note:** Timely replacement of ball bearings and collar bushes will prevent costly damage to the gearbox.

6. Check planet wheels (pos. 15.4 and 15.5, page 18) while still mounted in planet gear carrier (pos. 15.6, page 18). They must rotate easily on shafts. If restriction or much clearance on shafts is felt, planet wheels should be dismantled for inspection of bearing bushes and shafts for planet wheel (pos. 15.2, page 18). Max diameter of holes: 6.2 mm. Check tooth wear.  
If replacement is necessary, planet wheels must be replaced as a pair.
7. Check unrestricted rotation of ball bearings. Inspect for build-up of foreign material on PEEK-bushings (pos. 9.1 and 18.1, page 20), in ball retainers (pos. 10, page 20) and ball races.
8. Assemble machines as described in the following pages.
9. Check that the machine is in operating condition by inserting 3/16" Hex screwdriver (tool no. 134A) in screw in top of turbine shaft, and easily turn turbine shaft anti-clockwise. If any resistance is recognised, the machine should be disassembled in order to localise the cause.

Apart from the parts specifically mentioned above, all the remaining wear parts should regularly be inspected for wear. Wear parts are specified in the Reference List of Parts, page 30.

---

## 6 Maintenance

---

### 6.3 Assembly of Turbine and Carrier

---

#### Disassembly

1. Remove M5 screws (pos. 8). Loosen and unscrew with a socket wrench (tool no. 462A).
2. Lift off cone (pos. 1).
3. Withdraw turbine shaft (pos. 2) with impeller. If necessary, turn turbine shaft left and right.
4. Remove circlip (pos. 4) and pull off impeller (pos. 5).
5. Withdraw carrier assembly (pos. 15) while turning/rocking carrier left and right.
6. Remove cotter pins (pos. 15.7), pull out shafts (pos. 15.2) and remove planet wheels (pos. 15.4 and 15.5). If necessary, push out carrier bearing (pos. 15.3)
7. If necessary, push out bearing for turbine shaft (pos. 3) from cone (pos. 1).


#### Reassembly

Before reassembly, make sure that all parts are clean without deposits or build-up of foreign matter.

1. Insert bearing (pos. 3) in top of cone (pos. 1) and push home with thumb.
2. Insert carrier bearing (pos. 15.3) and push with thumb. Insert planet wheels (pos. 15.4 and 15.5) and shafts (pos. 15.2) and secure with cotter pins (pos. 15.7). Check free rotation of planet wheels.
3. Insert carrier assembly (pos. 15), into body: Insert through stem (pos. 16, page 20). Hold body in one hand and use the other to turn hub cover (pos. 19) left and right with small rocking movements until carrier falls through internal gear (pos. 13, page 20). Check that carrier is fully home on bearing for turbine shaft (pos. 3). In body: Rotate carrier assembly by hand a few rotations to check correct position and function.
4. Mount impeller (pos. 5) on turbine shaft (pos. 2) and secure with circlip (pos. 4).
5. Insert turbine shaft with impeller through carrier assembly. Rotate impeller to ensure correct insertion into bearing for turbine shaft (pos. 3) in body. Check unrestricted rotation.
6. Mount cone (pos. 1) over turbine shaft and retaining ring. Mount and tighten screws (pos. 8) with socket wrench (tool no. 462A).

<p><b>Note:</b> The two planet wheels are different: on planet wheel 1, teeth of upper and lower gearing are aligned, while they are displaced <math>\frac{1}{2}</math> tooth on planet wheel 2.</p>
--

Assembly of Turbine and Carrier

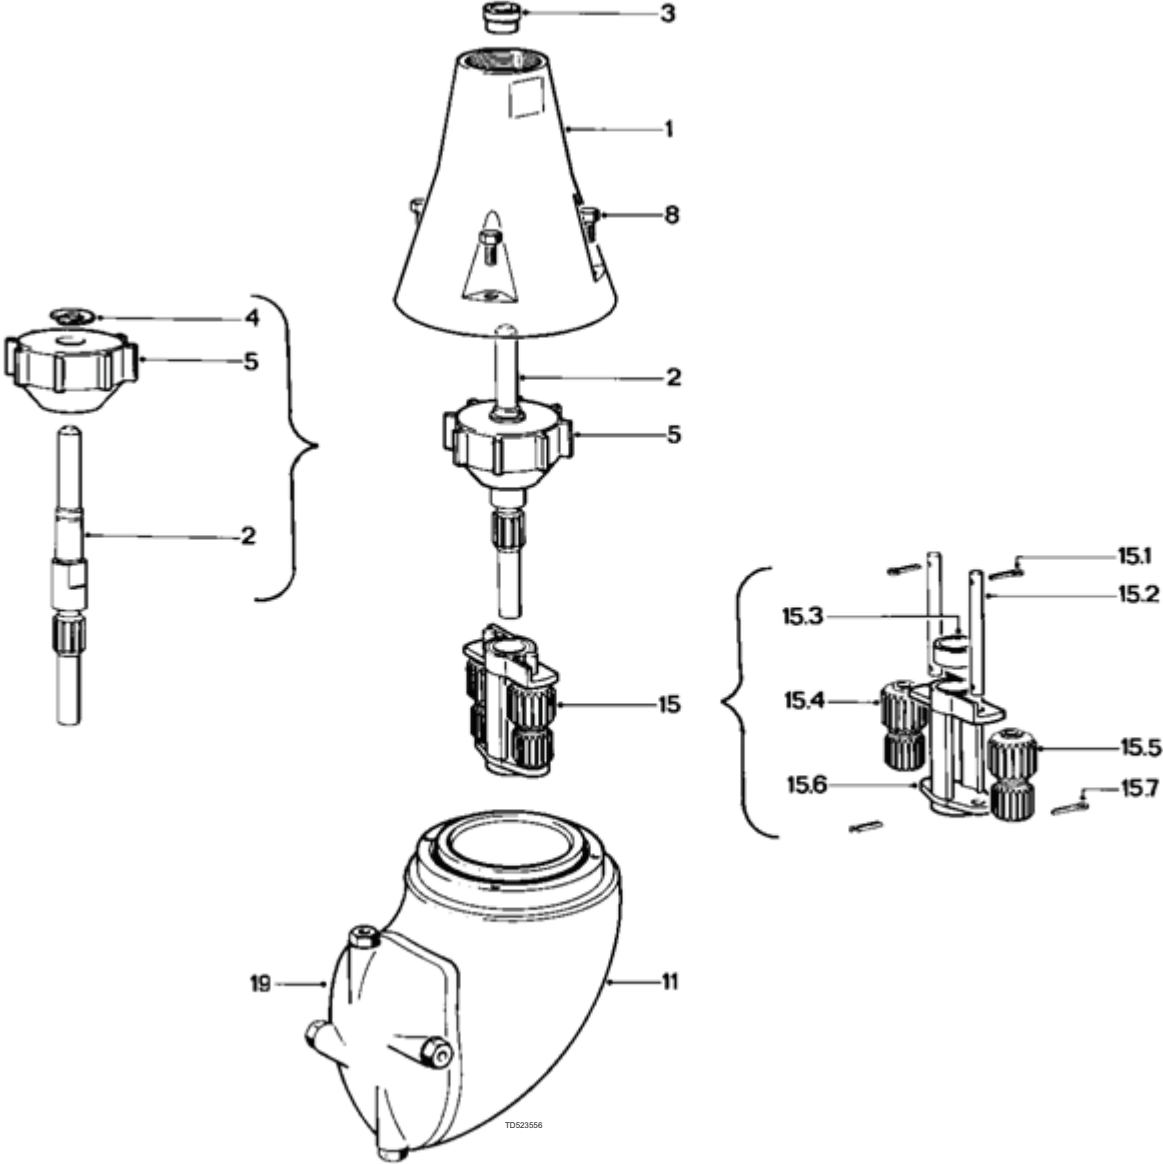

## 6 Maintenance

---

---

---

### 6.4 Remaining Assemblies

---

#### Disassembly

1. Remove retainer spring (pos. 6). Use small screwdriver to lift retainer spring out of groove in stem (pos. 16). Lift off retaining ring (pos. 7).
2. Hold body against table and unscrew stem nut w. ball race (pos. 9) with caliper (tool no. 369). Withdraw stem (pos. 16) together with ball retainer w. balls (pos. 10).
3. Remove M5 screws (pos. 12) with a socket wrench (tool no. 462A) and draw out internal gear (pos. 13).
4. Insert a 13 mm spanner (tool no. 81B041) into body, hold cap nut (pos. 23) and by hand screw off hub cover (pos. 19), and remove washer (pos. 22).
5. Hold body against table and unscrew hub nut with ball race (pos. 18) with caliper (tool no. 369). Withdraw hub (pos. 17) together with ball retainer with balls (pos. 10).
6. With screwdriver lift slide bearing (pos. 14) and bearing for turbine shaft (pos. 3) out of body.
7. Unscrew nozzles (pos. 21) with 11 mm spanner (tool no. 81B041). Be careful not to damage nozzle vanes (pos. 20) as this will severely reduce nozzle performance. Nozzle vanes should not be removed unless they need to be replaced.

If PEEK-bushings (pos. 9.1 and 18.1) are worn, they can easily be replaced, see page 24

If ball races (pos. 16.2 and 17.2) on stem and hub as well as stem/hub nut with ball race (pos. 9 and 18) are heavily worn, they should be replaced as well as ball retainer with balls (pos. 10), see page 23.

**Note:** Left-hand thread



#### Reassembly

Before reassembly make sure that all parts are clean without deposits or build-up of foreign matter.

1. If necessary insert new nozzle vanes (pos. 20, see drawing page 20). Be careful not to damage nozzle vanes. Mount nozzles (pos. 21) and tighten with spanner.
2. Place slide bearing (pos. 14) in body and push in bearing for turbine shaft (pos. 3) with thumb. Make sure that bearing is fully home.
3. Inset hub (pos. 17) together with ball retainer with balls (pos. 10). Mount hub nut with ball race (pos. 18) with caliper (tool no. 369) and tighten.
4. Place washer (pos. 22) on threaded pin on hub cover and mount cap nut (pos. 23). Insert spanner (tool no. 81B041) into body, hold cap nut (pos. 23) and by hand screw on hub cover (pos. 19) and tighten. Check free rotation of hub.
5. Insert internal gear (pos. 13), mount screws (pos. 12) and tighten with socket wrench (tool no. 462A).
6. Insert stem (pos. 16) together with ball retainer with balls (pos. 10). Mount stem nut with ball race (pos. 9) with caliper (tool no. 369) and tighten. Turn hub cover and check unrestricted rotation.
7. Place retaining ring (pos. 7) over stem (pos. 16) and push on retainer spring (pos. 6) and "click" into groove in stem. Check free rotation.

**Note:** Left-hand thread

Remaining Assemblies

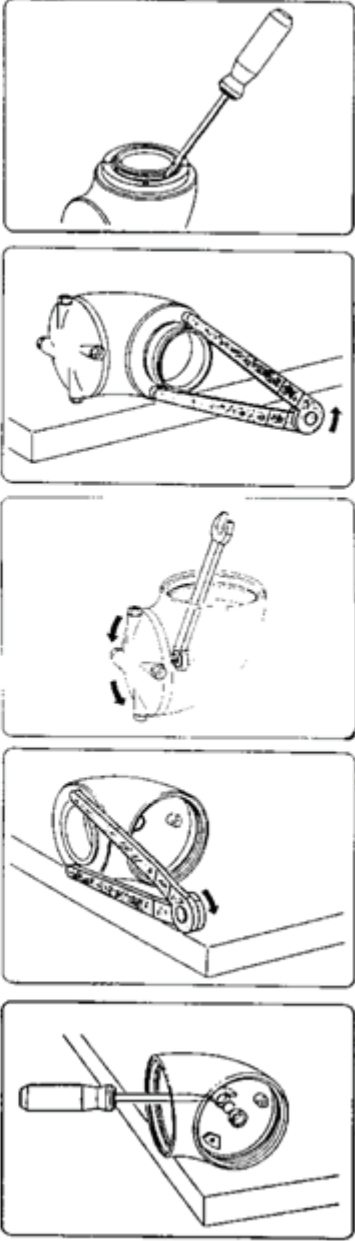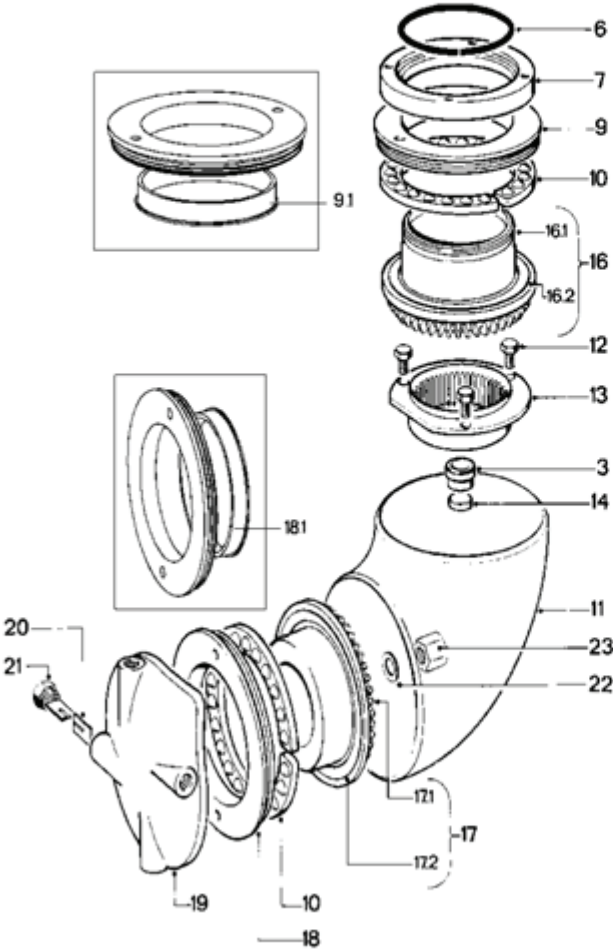

TDS23557

## 6 Maintenance

---



---

---

### 6.5 Replacement of Ball Races



---

1. Place stem or hub complete (pos. 16 or 17, see page 31) in a support ring and press off ball race. Press parallel. Use press or vice. Be careful not to damage teeth and opposite end face of stem.
2. With mandrel press ball race fully home. Press parallel. Use press or vice. Be careful not to damage surface of ball race.

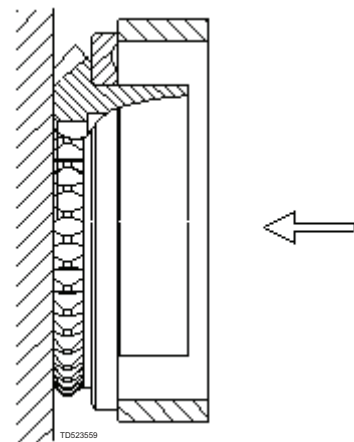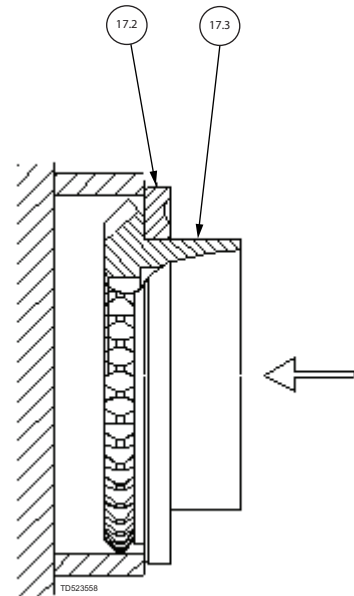

6.6 Replacement of PEEK-bushing

- 1. Place stem nut (pos. 9 or 18, see page 31) in a support ring and press the PEEK-bushing off. Press parallel. Use press or vice. Be careful not to damage the inner face of stem nut and the surface of the ball race.
- 2. With support ring press PEEK-bushing fully home. Press parallel. Use press or vice. Be careful not to damage surface of ball race.

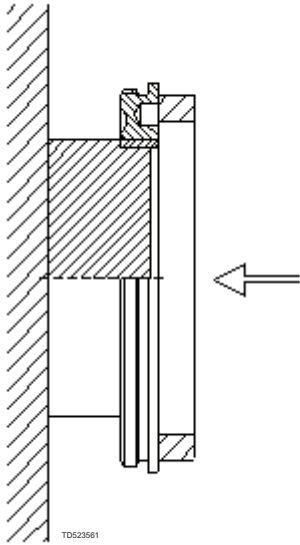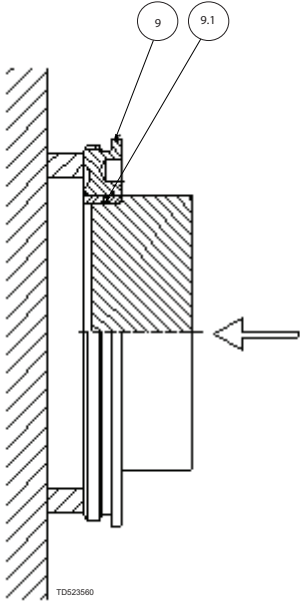



## 7 Trouble Shooting Guide

---

Symptom: Slow or no rotation of machine

Possible Causes	Fault finding
<b>No or insufficient liquid flow</b>	<p>a). Check if supply valve is fully open. b). Check if inlet pressure to mixer is correct. c). Check supply line/filter for restrictions/clogging. d). Remove nozzles and check for clogging. If blocked, carefully clean nozzle without damaging nozzle vanes and nozzle tip. e). Remove cone, guide and impeller and check for clogging in impeller area. f). If large particles repeatedly get jammed in the mixer, install filter or reduce mesh size of installed filter in supply line.</p>
<b>Foreign material or material build-up</b>	<p>Insert Hex screwdriver in screw in top of turbine shaft and easily turn turbine shaft clockwise. If any resistance is recognised, disassemble machine in order to localise the cause.</p>
a) Impeller jammed	Remove guide and impeller (see page 18) and remove foreign material.
b) Turbine shaft sluggish in main bush	Remove gland (see page 18) and clean main bush.
c) Planet gear jammed/sluggish	Remove foreign material from planet wheels and internal gears. Check rotation of planet wheels. If restriction is recognised, disassemble carrier assembly (see page 18) and remove material build up, especially on shafts and bushes in planet wheels.
d) Stem or hub jammed/sluggish	Remove carrier assembly (see page 18). Turn hub cover and check unrestricted rotation. Remove stem and hub (see page 20). Remove foreign material/material build-up on stem, hub, PEEK-bushing and inside nut with ball race. Clean ball races and ball retainer with balls. Assemble stem/hub, ball retainer with balls and stem/hub nut with ball race. Also clean main bush.
e) Bevel gears jammed	Remove flange/nipple and hub (see page 20). Clean teeth on stem and hub.

---

Possible Causes	Fault finding
-----------------	---------------

**Wear**

- |                              |  |
|------------------------------|--|
| a) Slide bearings            | See page 15  |
| b) Bearing for turbine shaft | See page 15  |
| c) Planet wheels             | See page 15  |
| d) Shafts for planet wheels  | Check clearance of planet wheels on shafts. Transverse movement should not exceed 0.3 mm.  |
| e) Turbine shaft             | Check clearance in carrier bearing and bearing for turbine shaft. Transverse movement should not exceed 0.3 mm. Also inspect teeth for wear. |
- 


**Mechanical defects**

- |   |   |
|---|---|
| a) Planet wheels. Teeth broken                        | Replace planet wheels.  |
| b) Planet wheel can not rotate on shafts/shafts bent. | Replace shafts for planet wheels.   |
| c) Damaged teeth on bevel gear                        | Inspect teeth on stem and hub for deformation. Mount hub and stem in body (See page 20). Hold body in upside down position and rotate Hub to check that bevel gears can work together. If damaged: Replace stem and/or hub. |
-

## 8 Technical Data

Weight of machine:	5.1 kg (11.2 lbs)
Working pressure:	3-8 bar (40-115 psi)
Recommended inlet pressure:	5-7 bar (70-100 psi)
Working temperature max.:	110°C (230°F)
Max. temperature:	140°C (284°F) - steam pressure = 2.5 bar
Materials:	Stainless Steel, PFA, PEEK, PVDF, A4/EPDM

### Dimensions in mm

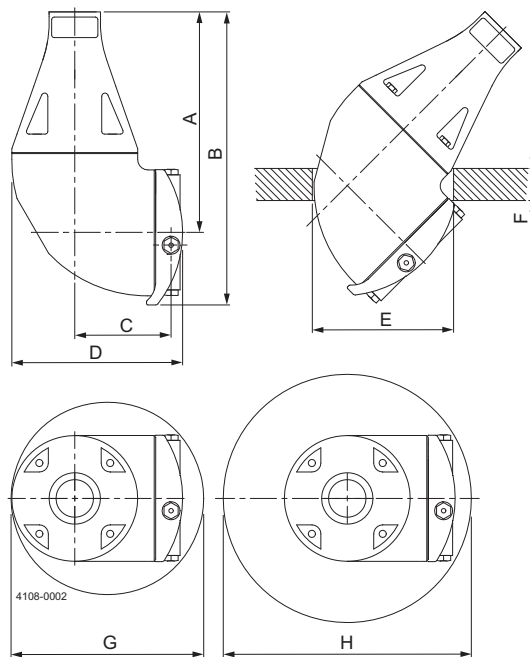


A	B	C	D	E	F	G	H
173	230	75	133	ø110	Max. 25	ø150	ø200

Minimum required passage: ø110 mm (4.33 inch) at flange thickness 25 mm (0.98 inch). Otherwise ø150 mm (5.90 inch)


Performance Data

Flow rate m<sup>3</sup>/h  
m<sup>3</sup>/h

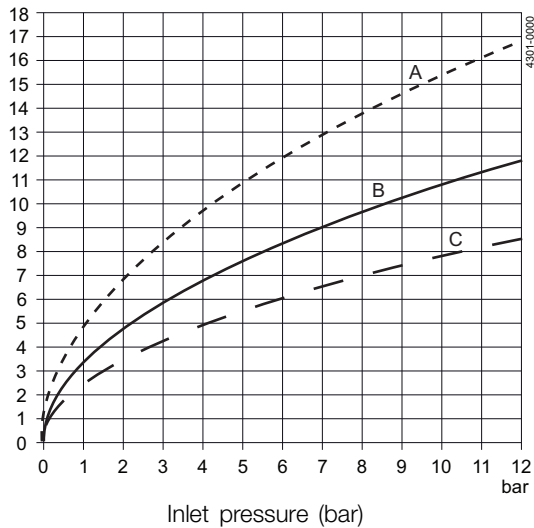


Nozzles A) d = 5.5 mm  
B) d = 4.6 mm  
C) d = 3.9 mm

Throw length (m)  
m

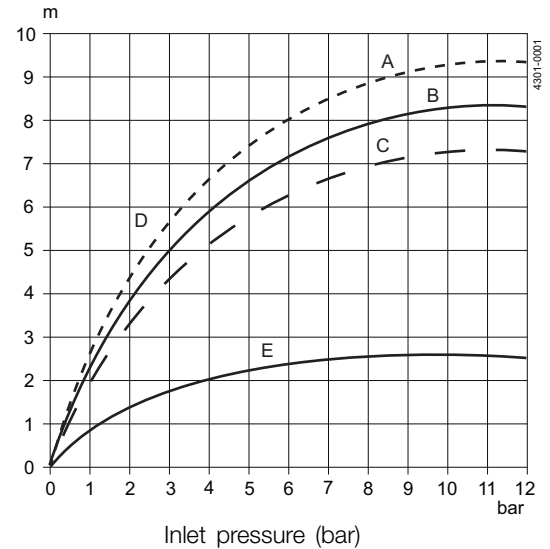

Nozzles A) d = 5.5 mm D) Cleaning  
B) d = 4.6 mm E) Mixing  
C) d = 3.9 mm

Min. RPM of machine body

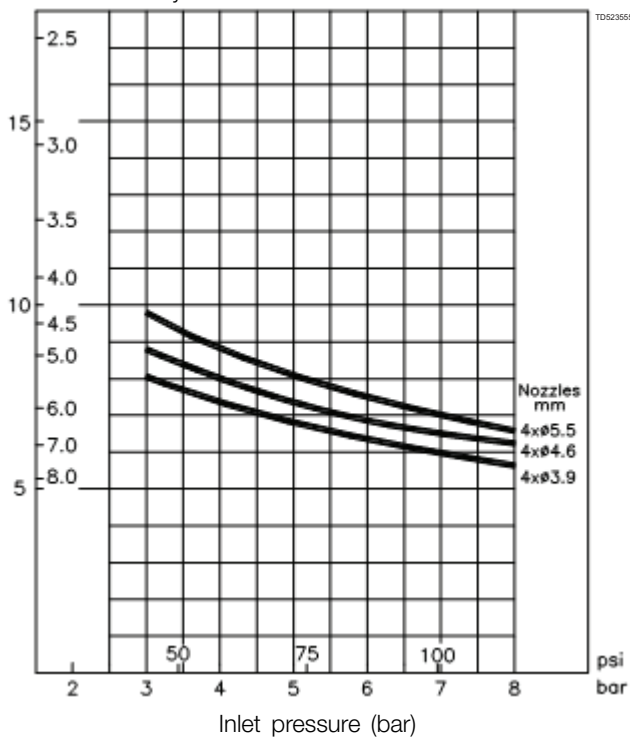

Note:

The distance (reach) of the jet from the rotary nozzles at which the jets still have a reasonable mixing effect depends i.a. of pressure, the diameter of the nozzles, the viscosity of the fluid, the desired mixing time and various other parameters.

The effective reach of the jets as indicated above is in a fluid with a viscosity of 1 cP.

The pressure is measured at the mixer. This means that due consideration shall be taken to pressure drops in the recirculation line from the pump to the mixer as well as to static pressure differences, when the jet mixing system is being dimensioned.

## 9 Product Programme

---

### 9.1 Standard configuration for Alfa Laval Rotary Jet Mixer IM 10

---


Connection	Nozzles (mm)	Article No.
1" BSP, Female	4 x $\varnothing$ 3.9	TE30B030
	4 x $\varnothing$ 4.6	TE30B040
	4 x $\varnothing$ 5.5	TE30B050
1" NPT, Female	4 x $\varnothing$ 3.9	TE30N030
	4 x $\varnothing$ 4.6	TE30N040
	4 x $\varnothing$ 5.5	TE30N050

## 9.2 Available add-ons


Welding adapter with sealing assembly between down pipe, welding adapter and machine.

Pipe Dimension in mm	Connection thread	Article No.
1" ISO thread pipe: $\varnothing 33.7 \times 3.25$	1" BSP	TE52D030
1" ANSI Sch.40S: $\varnothing 33.4 \times 3.38$	1" NPT	TE52D031
1½" ISO Dairy pipe: $\varnothing 38 \times 1.2$	1" BSP	TE52D032

For devices with tapered thread connections to the down pipe, it is recommended that you secure the connection in a manner appropriate for the application. Subject to the intended use environment and any in-house user requirements or policies, an adhesive such as Loctite No. 243 or equivalent could be used. Other methods could be acceptable and subject to customer preference.

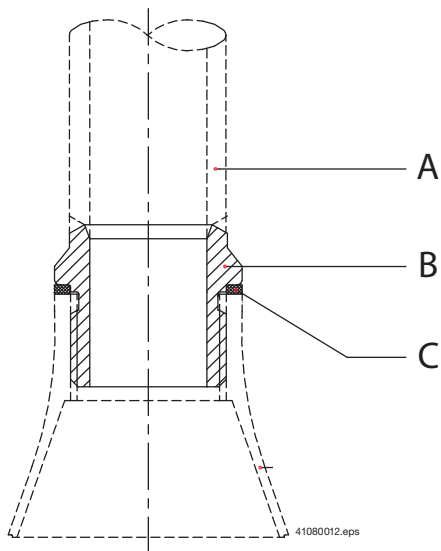

A: Down pipe  
 B: Welding adapter  
 C: Seal PTFE

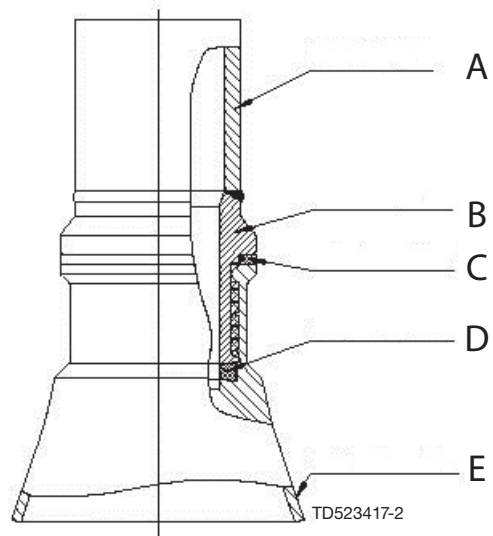

A: Down pipe  
 B: Welding adapter  
 C: Seal PTFE  
 D: Seal EPDM  
 E: IM-10

## 10 Parts Lists and Drawings, Service Kits and Tools


### 10.1 Reference list of parts

Pos.	Item no..	Qty.	Denomination	Material	Remarks
1	<input type="checkbox"/> TE20G508	1	Cone 1" BSP	Stainless steel	Spare part
2	TE30B511	1	Turbine shaft	Stainless steel	Spare part
3	TE20G549	1	Bearing for turbine shaft (body)	Polymer	Wear part
4	TE51C201	1	Circlip RS 10, DIN 6799	Stainless steel	Spare part
5	<input type="checkbox"/> TE20G553	1	Impeller (ø335/3.9 mm nozzle)	Polymer (PEEK or PVDF)	Spare part
	<input type="checkbox"/> TE20G554	1	Impeller (ø4.5/4.6 mm nozzle)	Polymer (PEEK or PVDF)	Spare part
	<input type="checkbox"/> TE20G555	1	Impeller (ø5.5 mm nozzle)	Polymer (PEEK or PVDF)	Spare part
6	TE20G565	1	Retainer spring	Stainless steel	Spare part
7	TE20G563	1	Retaining ring	Stainless steel	Spare part
8	TE51A172	4	Screw	Stainless steel	Spare part
9	TE20G571	1	Stem nut with ball race	Stainless steel	Wear part
10	TE20B302	2	Ball retainer with balls	PFA /Stainless steel	Wear part
11	TE20G512	1	Body	Stainless steel	*Note
12	TE51A170	3	Screw	Stainless steel	Spare part
13	TE20G525	1	Internal gear	Stainless steel	Spare part
14	TE20G558	1	Slide bearing	Polymer	Wear part
15	TE30B305	1	Planet complete		Spare part
15.1	TE20G530	1	Planet gear carrier	Stainless steel	Spare part
15.2	TE20G545	1	Bearing for Planet Gear carrier	Polymer	Wear part
15.3	TE30B514	2	Shaft for Planet wheel	Stainless steel	Spare part
15.4	TE51C102	2	Cotter pin	Stainless steel	Spare part
15.4	TE20G535	1	Planet wheel I	Polymer	Wear part
15.5	TE20G536	1	Planet wheel II	Polymer	Wear part
16	TE20G319	1	Stem complete	Stainless steel	Spare part
16.1	TE20G624	1	Stem	Stainless steel	Spare part
16.2	TE20G574	1	Ball race	Stainless steel	Wear part
17	TE20G320	1	Hub complete	Stainless steel	Spare part
17.1	TE20G625	1	Hub	Stainless steel	Spare part
17.2	TE20G574	1	Ball race (=pos. 16.2)	Stainless steel	Wear part
18	TE20G573	1	Hub nut with ball race	Stainless steel	Wear part
18.1	TE20G621	1	Bushing	PEEK	Wear part
19		1	Hub cover with pin	Stainless steel	*Note
20	TE20G594	8	Nozzle vane	Stainless steel	Spare part
21	<input type="checkbox"/> TE20G608	4	Nozzle ø3.9 mm	Stainless steel	Spare part
	<input type="checkbox"/> TE20G609	4	Nozzle ø4.6 mm	Stainless steel	Spare part
	<input type="checkbox"/> TE20G605	4	Nozzle ø5.5 mm	Stainless steel	Spare part
22	TE20G584	1	Washer, USIT	Stainless steel/Elastomer	Spare part
23	TE51A521	1	Cap nut	Stainless steel	Spare part
24	TE20G548	1	Bearing for turbine shaft (cone)	Polymer	Wear part

Configuration according to delivery note/order.

\*Note: Pos. 11 and pos. 19 are not sold as single spare part components but only as part of a machine maintenance/repair order. For further information please contact Alfa Laval Customer Support.

10.2 Cross sectional drawing

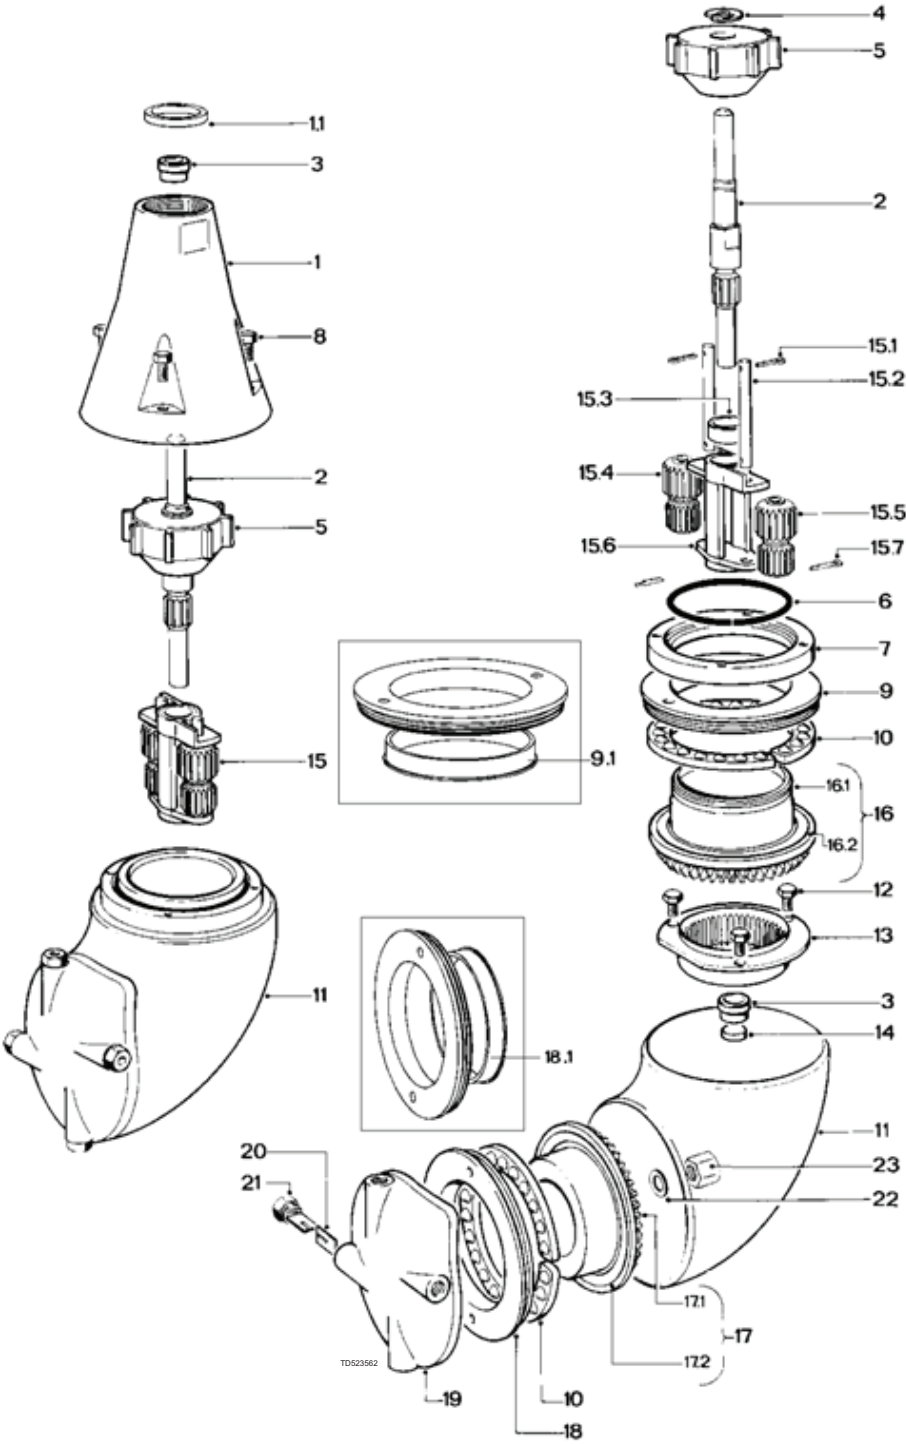



## 10 Parts Lists and Drawings, Service Kits and Tools

---

### 10.3 Service kit

---

Service Kit, Article no. TE30B299

Item no.	Denomination	Qty.
TE20G549	Bearing for turbine shaft	1 pcs.
TE20G571	Stem nut with ball race	1 pcs.
TE30B302	Ball retainer with balls	2 pcs.
TE20G558	Slide bearing	1 pcs.
TE51C102	Cotter pin	2 pcs.
TE20G545	Bearing for planet gear carr.	1 pcs.
TE20G535	Planet wheel I	1 pcs.
TE20G536	Planet wheel II	1 pcs.
TE20G574	Ball race	2 pcs.
TE20G573	Hub nut with ball race	1 pcs.
TE20G584	Washer	1 pcs.
TE20G548	Bearing for turbine shaft, top	1 pcs.

### 10.4 Tools

---

Standard Tool Kit, Article no. TE81B085

Item no.	Denomination
369	5 mm caliper
462A	8 mm socket wrench with pin
81B040	Spanner, 36 mm
81B041	Spanner, 12/13 mm

---

### 11.1 Service & Repair

---

Upon every return of a product, no matter if for modifications or repair, it is necessary to contact your local Alfa Laval office to guarantee a quick execution of your request.

You will receive instructions regarding the return procedure from your local Alfa Laval office. Be sure to follow the instructions closely.

---

### 11.2 How to order Spare Parts

---

On the Cross Sectional Drawings as well as on all instruction drawings, the individual parts have a pos. no., which is the same on all drawings. From the pos. No. the part is easily identified in the Reference List of Parts, page 30.

Individual parts should always be ordered from the Reference List of Parts, page 30. Ref. No. and description should be clearly stated.

Please also quote the type of machine and serial No. This will help us to help you. The type and serial Nos. are stamped on the Connection Nipple on the top of the tank cleaning machine.

---

### 11.3 How to contact Alfa Laval Tank Equipment

---

For further information please feel free to contact:

**Alfa Laval Tank Equipment**  
**Alfa Laval Kolding A/S**  
31, Albuen - DK 6000 Kolding - Denmark

Registration number: 30938011  
Tel switchboard: +45 79 32 22 00 - Fax switchboard: +45 79 32 25 80  
[www.toftejorg.com](http://www.toftejorg.com), [www.alfalaval.dk](http://www.alfalaval.dk) - [info.dk@alfalaval.com](mailto:info.dk@alfalaval.com)

Contact details for all countries are continually updated on our websites

---

## 12 Miscellaneous

---

### 12.1 Declaration of Compliance with 10/2011 – Food contact materials

---

#### Declaration of compliance for food contact materials



Article Nr: TE30Bxxx  
TE30Nxxx

Product IM-10

We, Alfa Laval Kolding A/S, hereby certify that the plastic articles intended to come into contact with product included in the article stated above comply with the Regulation (EC) No. 1935/2004 and the Regulation (EC) No. 10/2011 both in their relevant versions on materials and articles intended to come in contact with food.

Finished articles subject to an overall migration limit of 10 mg/dm<sup>2</sup> or 60 mg/kg. The following substances subject to limitations are used in the above stated article: SML:

PEEK 450G (PEEK GLD FG 140)  
Diphenylsulphor: 3 mg/kg food  
1,4 Dihydroxybenzol: 0.6 mg/kg food  
4,4' Defluorobenzopheneone: 0.05 mg/kg food  
(TFE: 0.05 mg/kg/kg food)

PFA and PTFE  
TFE: 0.05 mg/kg food  
PPVE: 0.05 mg/kg food

PVDF  
VDF: 5 mg/kg food  
Antioxydant: 5 mg/kg food

Migration from the plastic articles has been investigated by calculations as laid down in paragraph (32) in Regulation (EC) No. 10/2011, to control that the migration limits and other requirements are fulfilled. The articles can be used, within its application area, with all type of foods at batch size above 1,500 kg\*.

We also certify that the plastic articles intended to come into contact with product included in the article stated above are also entirely in accordance with the present US regulation FDA CFR 21§ 177.

Kolding, February 2, 2015

A handwritten signature in blue ink, appearing to read "Henrik Falster-Hansen".

---

Henrik Falster-Hansen  
R&D Manager  
Alfa Laval Kolding A/S

\*Based on worst case scenario = dissolving 100% of the polymer material in one single batch

**Alfa Laval Kolding A/S**  
Albuen 31, 6000 Kolding, Denmark  
Tel switchboard: +45 79 32 22 00 - Fax switchboard: +45 79 32 25 80  
[www.alfalaval.com](http://www.alfalaval.com)

**How to contact Alfa Laval**

Contact details for all countries are continually updated on our website.

Please visit [www.alfalaval.com](http://www.alfalaval.com) to access the information directly.

© Alfa Laval Corporate AB

This document and its contents is owned by Alfa Laval Corporate AB and protected by laws governing intellectual property and thereto related rights. It is the responsibility of the user of this document to comply with all applicable intellectual property laws. Without limiting any rights related to this document, no part of this document may be copied, reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), or for any purpose, without the expressed permission of Alfa Laval Corporate AB. Alfa Laval Corporate AB will enforce its rights related to this document to the fullest extent of the law, including the seeking of criminal prosecution.