





**Dimensions (mm)**

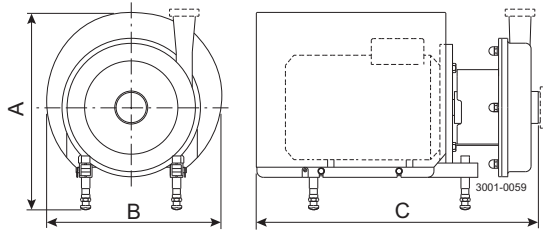

**Flow chart** Frequency 50 Hz, Speed (Synchr): 3000 rpm

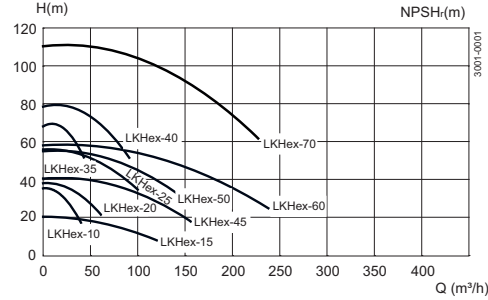

**Note** that most of the dimensions depend on motor supplier and motor size. Non-dependent dimensions are equal to the dimensions for LKH.

	LKH10 Exe				LKH15 Exe		LKH20 Exe					LKH25 Exe		
	1.85kW	2.5kW	3.3kW	4.6kW	3.3kW	4.6-5.5kW	1.85kW	2.5kW	3.3kW	4.6-5.5kW	7.5kW	4.6-5.5kW	7.5-12.5kW	15kW
A min	413	418	392	432	392	432	413	418	392	432	532	432	532	581
A max	499	528	505	565	505	565	499	528	505	565	649	565	649	618
B	290	325	360	425	360	425	290	325	360	425	510	425	510	553
C	532	561	591	685	627	716	545	573	603	692	853	698	859	908

	LKH35 Exe			LKH40 Exe			LKH45 Exe			LKH50 Exe			
	4.6-5.5kW	7.5-12.5kW	15kW	7.5-12.5kW	15kW	20kW	4.6-5.5kW	7.5-12.5kW	15kW	5.5kW	7.5-12.5kW	15kW	20kW
A min	432	532	549	532	581	661	432	532	581	432	532	581	661
A max	565	649	666	649	686	786	565	649	686	565	649	686	786
B	425	510	553	510	553	673	425	510	553	425	510	553	673
C	683	844	888	854	899	989	712	873	917	706	867	911	1005

	LKH60 Exe				LKH70 Exe				
	5.5kW	7.5-12.5kW	15kW	20-24kW	12.5kW	15kW	20-24kW	36kW	47-58kW
A min	432	532	581	661	532	581	661	881	
A max	565	649	686	786	669	686	786	942	
B	425	510	553	673	510	425	673	800	
C NW 150	785	946	990	1084	969	1014	1108	1296	
C 4"	735	896	940	1034	879	924	1018	1206	
C 6"	775	936	980	1074	969	1014	1108	1296	

	LKH10 Exd , Exde			LKH15 Exd , Exde			LKH20 Exd , Exde				LKH25 Exd , Exde		
	1.5-2.2 kW	3kW	4kW	3kW	4kW	5.5kW	1.5-2.2 kW	3kW	4kW	5.5-7.5kW	4kW	5.5-7.5kW	11-15kW
A min	413	418	438	418	438	483	413	418	438	483	438	483	573
A max	499	528	551	528	551	616	499	528	551	616	551	616	690
B	290	325	360	325	360	425	290	325	360	425	360	425	510
C	532	561	591	546	627	716	545	573	603	692	608	698	537

	LKH35 Exd , Exde			LKH40 Exd , Exde			LKH45 Exd , Exde			LKH50 Exd , Exde		
	4kW	5.5-7.5kW	11-15kW	7.5kW	11-18.5kW	22kW	4kW	5.5-7.5kW	11-15kW	5.5-7.5kW	11-15kW	22kW
A min	438	483	573	483	573	625	438	483	573	483	573	625
A max	551	616	690	616	690	730	551	616	690	616	690	730
B	360	425	510	425	510	553	360	425	510	425	510	553
C	594	785	948	693	856	870	623	712	875	706	869	882

	LKH60 Exd , Exde				LKH70 Exd , Exde			
	5.5-7.5kW	11-18.5kW	22kW	30kW	11-18.5kW	22kW	30-37kW	55-75kW
A min	483	573	625	661	573	625	661	881
A max	616	690	730	786	710	730	786	942
B	425	510	553	673	510	553	673	800
C NW 150	785	948	991	1084	971	1015	1108	1296
C 4"	735	898	941	1034	881	925	1018	1206
C 6"	775	938	981	1074	971	1015	1108	1296

**Options**

- A. Impeller with reduced diameter.
- B. Double mechanical shaft seal.
- C. Rotating seal ring of Silicon Carbide.
- D. No motor shroud.
- E. Adjustable pads.
- F. Product wetted surface finish mechanically polished to  $Ra \leq 0.8 \mu m$ .
- G. Product wetted elastomers FPM, NBR or FEP.
- H. 1/2" drain connection.
- I. Hydrostatic testing with certificate.
- J. Surface finish measurement with certificate.

**Ordering**

Please state the following when ordering:

- Pump size.
- Connections.
- Impeller diameter.
- Motor size.
- Voltage and frequency.
- Flow, pressure, ambient and media temperature.
- Group, category and temperature class.
- Density and viscosity of the product.
- Options.

Alfa Laval reserves the right to change specifications without prior notification.

---

**How to contact Alfa Laval**

Contact details for all countries  
are continually updated on our website.  
Please visit [www.alfalaval.com](http://www.alfalaval.com) to  
access the information direct.